





Spremium | HANGZHOU SPREMIUM BATHROOM CO., LTD

ADD: Guali town, Xiao shan District, Hangzhou City, Zhejiang, China TEL: +8618623194779


QUOTATION

Model #	Photo	Item Size mm(W*H)	FOB	Description	Vol	MOQ	Amount (CBM)	Amount (USD)
S-4696B		500x800	\$27.83	Touch switch Copper free mirror for black spot and edge avoid. Aluminum strip + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 4mm 8mm aluminum frame High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
S-4661S		600x600	\$27.17	Touch switch Copper free mirror for black spot and edge avoid. Aluminum strip + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 4mm 3.8cm aluminum frame High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		700x700	\$31.00			50		
		800x800	\$34.67			50		
S-4513		500X700	\$25.17	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 4mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		600x800	\$28.83			50		
		700X1000	\$35.17			50		
		800X800	\$32.17			50		
S-4589		500x900	\$27.83	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		600x1000	\$32.17			50		
S-4525		600x800	\$27.83	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
S-4528		600x600	\$23.83	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		700x700	\$27.33			50		
		800x800	\$31.17			50		
S-4515		500X700	\$25.17	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Infrared sensor; Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		600x800	\$28.83			50		
		700X1000	\$35.17			50		
S-4537		500X700	\$25.17	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch; Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50		
		600x800	\$28.83			50		
		700X1000	\$35.17			50		

S-4500		600x600	\$33.50	Touch switch Copper free mirror for black spot and edge avoid. Two LED light Anti-fog function; Three color switch;		50			
		700x700	\$37.83	Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50			
		800x800	\$43.50			50			
S-4502		500X700	\$36.00	Touch switch Copper free mirror for black spot and edge avoid. Embedded aluminum frame + waterproof box Anti-fog function; Three color switch;		50			
		600x800	\$41.17	Color temperature: 3000k-6500k Material thickness: 5mm High output SMD 2835 LED, 120LEDs/meter Water proof: IP44 rated		50			
		700X1000	\$50.17			50			
Total							1150	0.000	\$0.00

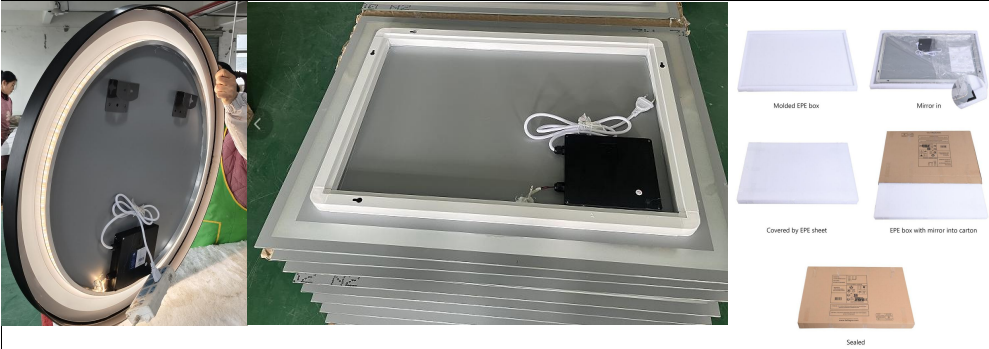

Notice:
Payment: T/T
Port of shipment: Ningbo, China
Warranty: 2years.
Delivery: 30 working days after receiving down payment

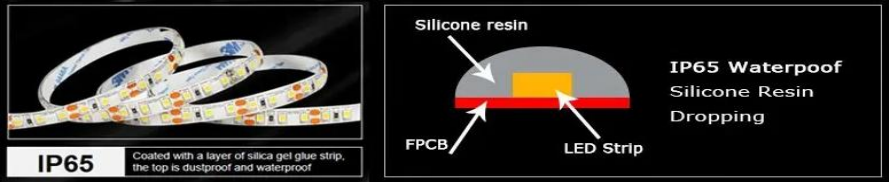

Factory Review - KEEP GROWING



The collage illustrates the manufacturing process of composite panels. It includes images of raw materials like resin and glass fibers, the resin infusion process, the curing process in an autoclave, and the final finished panels being stacked and packaged in a warehouse.

[illegible]

ATM for Report 231000524SHA-001

Page 1 of 1

ATM Issued: 29-Nov-2023

COMPLIANCE

SGS

VERIFICATION OF COMPLIANCE

No.:	LVO NEEES24000225ATHM
Applicant:	HANDICHO SPELUMBA DISTRIBUASI CO., LTD Room 317, Nakhonchong garden, No.111/2 West road, Quail town, Nakhon district, Nakhon city.
Manufacturer:	Same as applicant
Product Name:	LED H80004
Product Description:	Fume luminaire
Model No.:	See Page 2
Trade Mark:	
Rating:	170 - 240 V~; 50/60 Hz; 20 W
Protection against Electric Shock:	Class II
Degree of protection:	IP44
Additional information:	None
Sufficient samples of the product have been tested and found to be in conformity with	
Test Standard	EN IEC 60968-2:1 2021
as shown in the	EN IEC 60968-1:2021 and IEC 61011:2022
Report number(s)	NEES24000225ATH1

The Laboratory of Compliance has been granted to the applicant based on the result of tests, performed by the Laboratory of ISO9001:2015 Standards Technical Services Co., Ltd. and sample of the above mentioned product, for accreditation with the provision of the relevant national standards. The Low Voltage Directive 2014/34/EU. The CE marking as shown below can be affixed, under the responsibility of the manufacturer, after completion of an EC Declaration of conformity and compliance with relevant CE Directives. The affixing of the CE marking proves in addition that the conformances in annexes II and IV of the Directive are fulfilled.

Low Voltage Directive 2014/34/EU

2024-02-29

Compliance with the CE marking is based on the CE marking Technical Services Co., Ltd. and may not be reproduced either in its entirety or in part without the prior written consent of the SGS Group of Companies. The SGS Group of Companies is not liable for any errors or omissions in this document. The SGS Group of Companies is not responsible for the interpretation of the General Conditions of Sale and the specific conditions of sale. For more information, please contact your SGS representative in your country.

Salesby:CEC/2024/01/2024/1/2024

Page 1 of 2

[illegible]

2024.03.29

Safety-VOC-F01/ Rev. 1.0/ 2021-11-29
Page 1 of 2